



Laser-Direct-Drive Cryogenic Implosion Performance on OMEGA Versus Target and Laser-Spot Radius



Dimensions ~ Scale¹

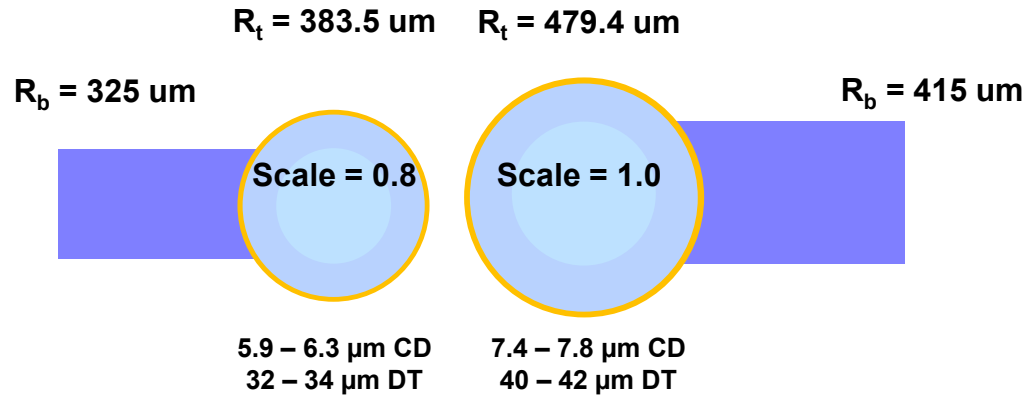

Flaws ~ Constant

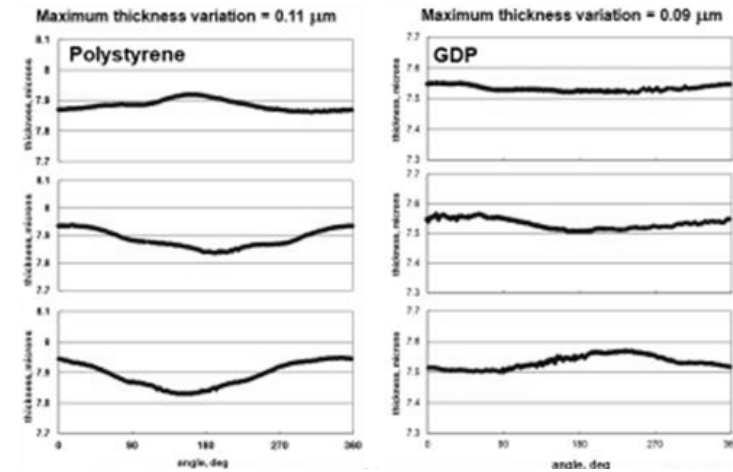

Power ~ Scale²
Time ~ Scale¹

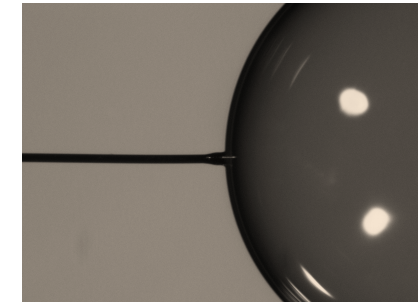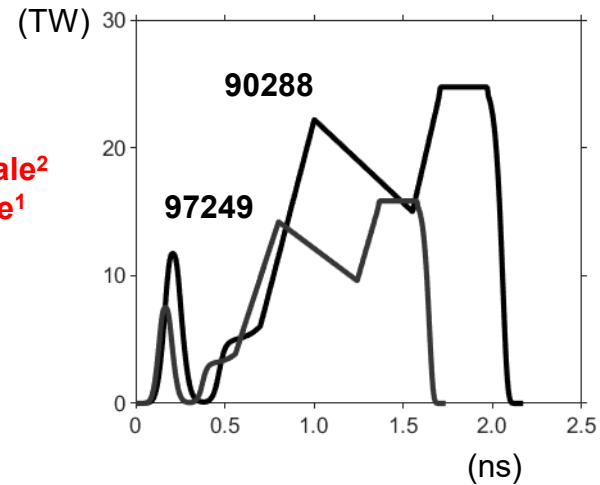


C. Thomas
University of Rochester
Laboratory for Laser Energetics

63rd Annual Meeting of the American Physical
Society Division of Plasma Physics
Pittsburgh, PA
8–12 November 2021

Data on scale (S = target radius/reference) and beam-to-target radius (R_b/R_t) have been used to extend the OMEGA database

- Measured yield and areal density increase as $S^{5.0 \pm 0.2}$ and $S^{1.8 \pm 0.2}$, respectively [Euler $\sim S^4$ and S]
- Experimental mitigation of the “beam mode” or beam radius can increase yield a factor of 1.4
- Calculations in 2-D predict similar trends, and are explained by laser and target flaws that do not scale (e.g., imprint, target offset, roughness)

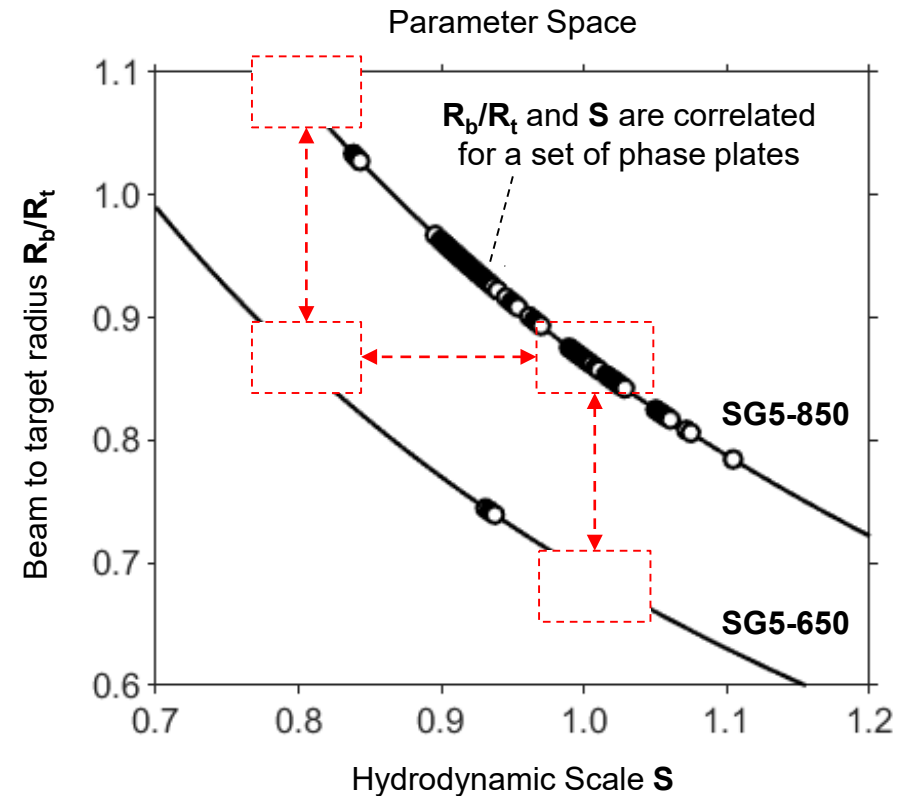

Goals: validation of stat model, perspectives on data vs theory, requirements for high gain

Collaborators



W. Theobald, J.P. Knauer, C. Stoeckl, T.J.B. Collins, V.N. Goncharov, R. Betti, E.M. Campbell, K.S. Anderson, K.A. Bauer, D. Cao, R.S. Craxton, D.H. Edgell, R. Epstein, C.J. Forrest, V.Yu. Glebov, V. Gopalaswamy, I.V. Igumenshchev, S.T. Ivancic, D.W. Jacobs-Perkins, R.T. Janezic, T. Joshi, J. Kwiatkowski, A. Lees, F.J. Marshall, M. Michalko, Z.L. Mohamed, D. Patel, J.L. Peebles, P.B. Radha, S.P. Regan, H.G. Rinderknecht, M.J. Rosenberg, S. Sampat, T.C. Sangster, R.C. Shah, K.L. Baker, A.L. Kritcher, M. Tabak, M.C. Herrmann, A.R. Christopherson

University of Rochester Laboratory for Laser Energetics



and

Lawrence Livermore National Laboratory

and O.M. Mannion*

***Currently at Sandia National Laboratory**

Progress in direct drive has accelerated with the use of statistical methods

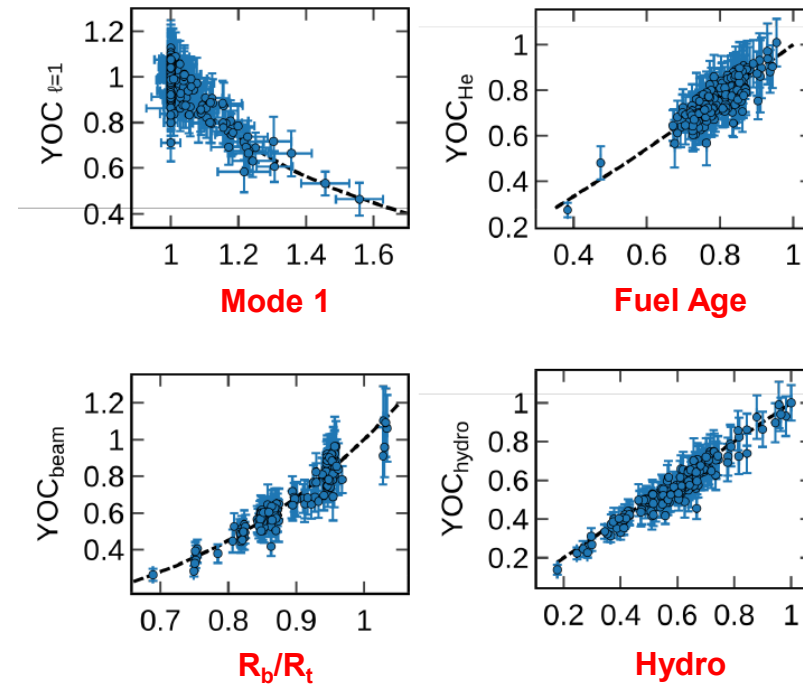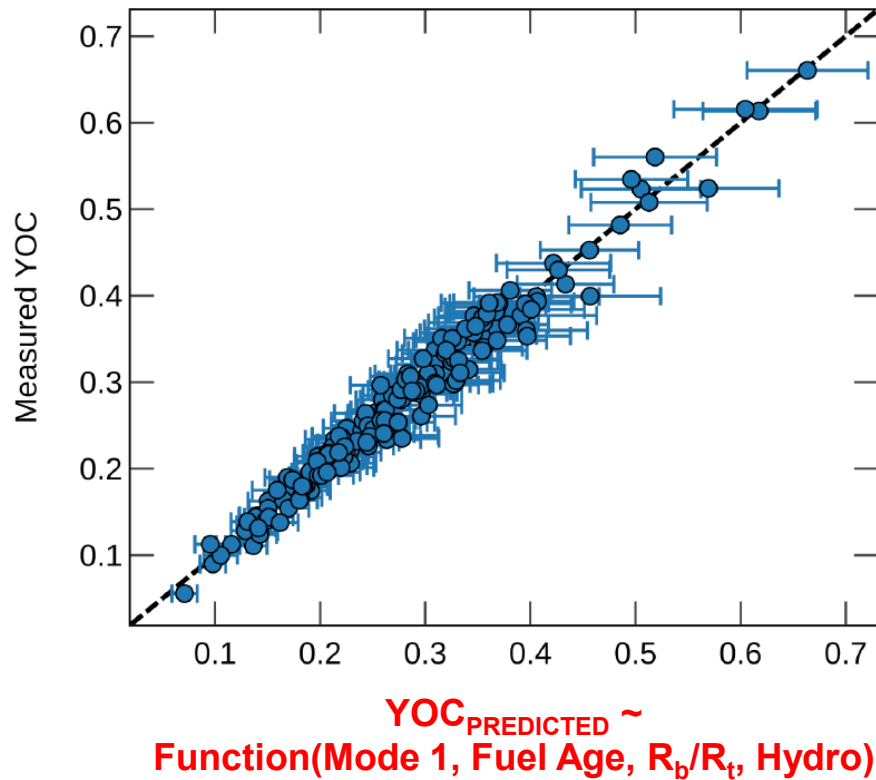

Individual sensitivities are being studied with focused experiments and simulations

Power laws are a useful way to compare data with theory, simulations, and the statistical model

Best case *Possible corrections to energetics, stability, and compression*

$$Y_{\text{MSR}} \sim Y_{1\text{-D}} (S)^{X_1} (v)^{X_2} (\alpha)^{X_3} (R_b/R_t)^{X_4}$$

Mechanisms in 1-D and 3-D?

$$X_1 \ln(S) \sim \ln(Y_{\text{MSR}}/Y_{1\text{-D}}) - X_2 \ln(v) - X_3 \ln(\alpha) - X_4 \ln(R_b/R_t)$$

Capsule size *Additional terms*

*Impact can exceed scale
(e.g., $X_4 \gg X_1$)*

*Source of uncertainty and
potential bias*


S = Hydrodynamic scale
v = Implosion velocity
 α = DT adiabat

R_b = Radius of laser beam
 R_t = Radius of target


Experiments can be 'designed' to reduce uncertainties vs scale, or any other parameter

For all of the work here, comparisons are simplified by maintaining constant pulse shape, shock-timing, adiabat, and in-flight aspect ratio or IFAR



Dimensions ~ Scale¹

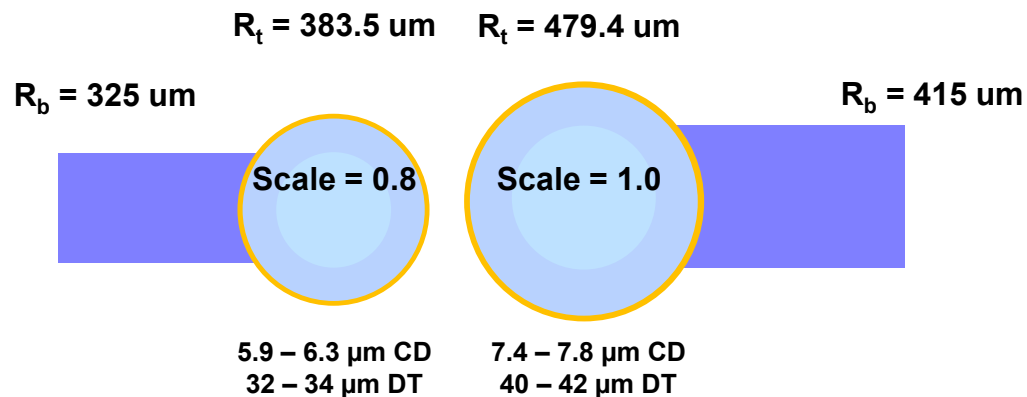


Flaws ~ Constant

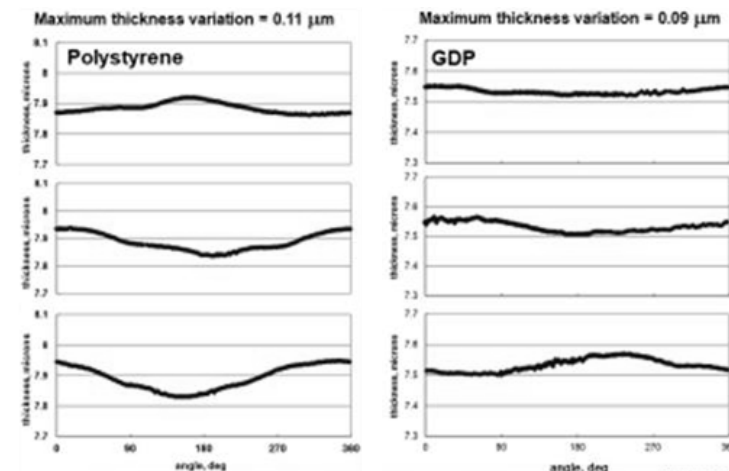


Power ~ Scale²
Time ~ Scale¹

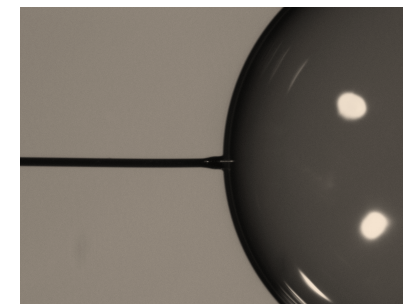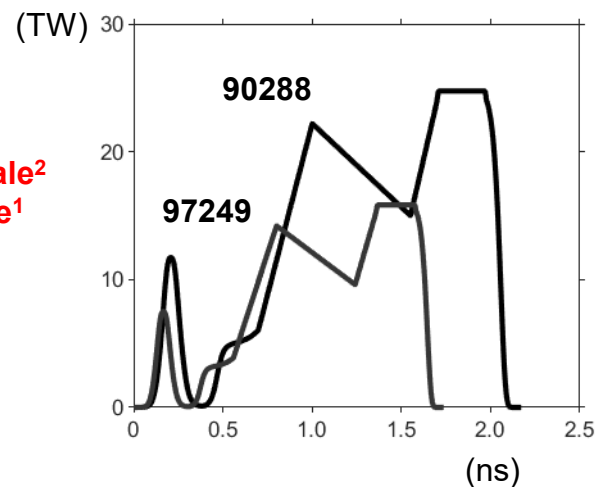

Yield and areal density improve with larger capsules, relative to 1-D theory

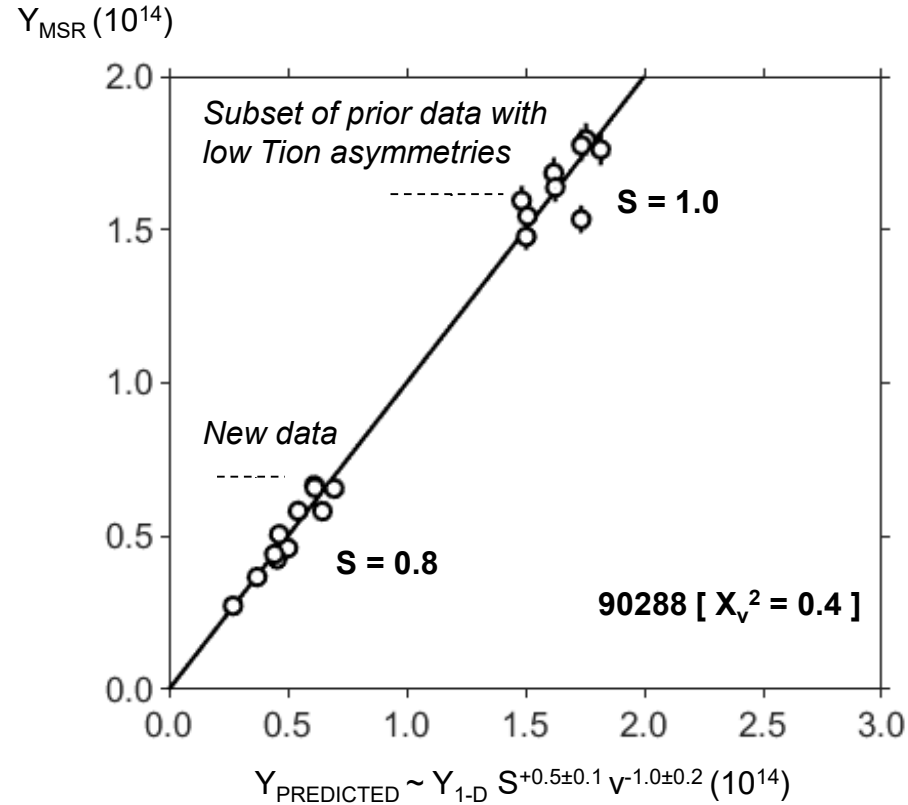



Hydrodynamic scale is main focus of study

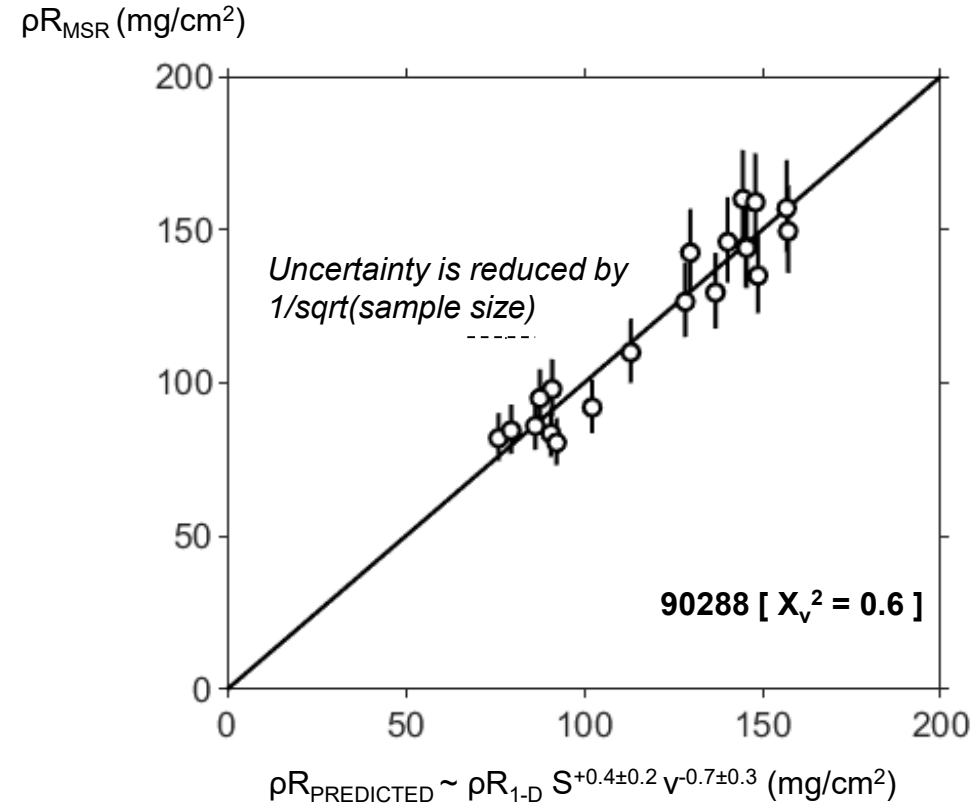

Velocity is predictable, the most important term in 1-D, and findings suggest instability



Statistical significance comes from precision of OMEGA laser, ~ 10 shots at each scale

Beam-to-target radius (R_b/R_t) can also be used to improve performance

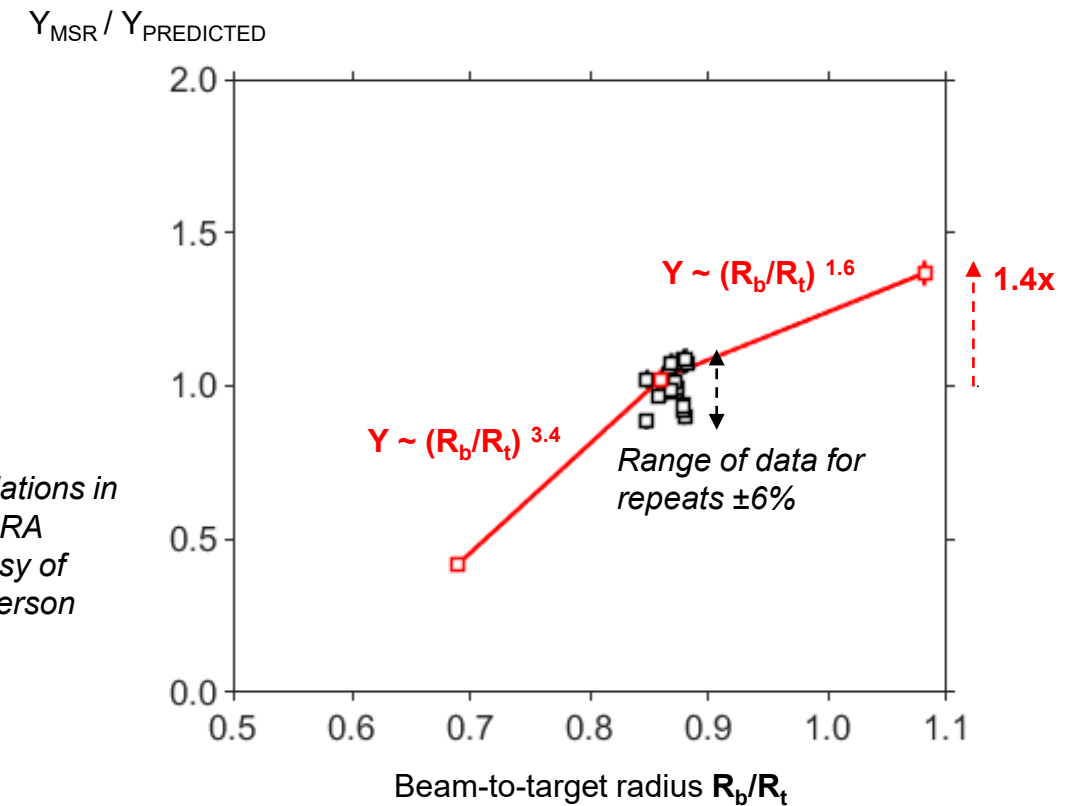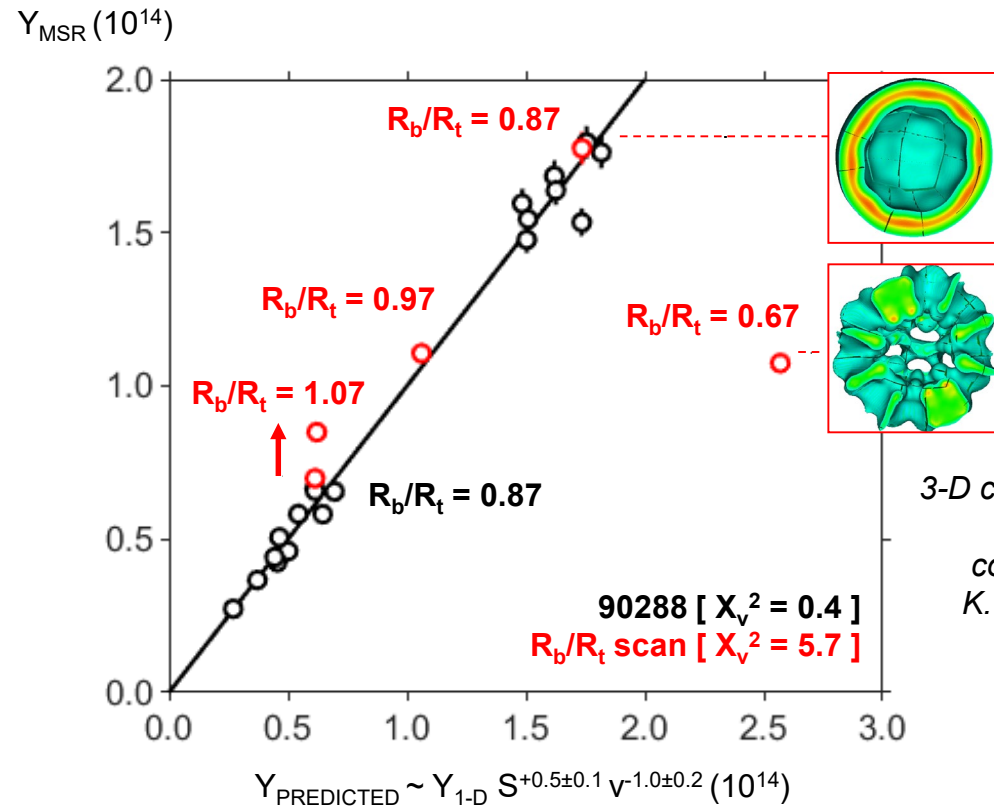



Interpretations may be a function of sampling, and final analyses will require more statistics

Calculations in DRACO can be used to predict performance vs flaws (in 2-D)

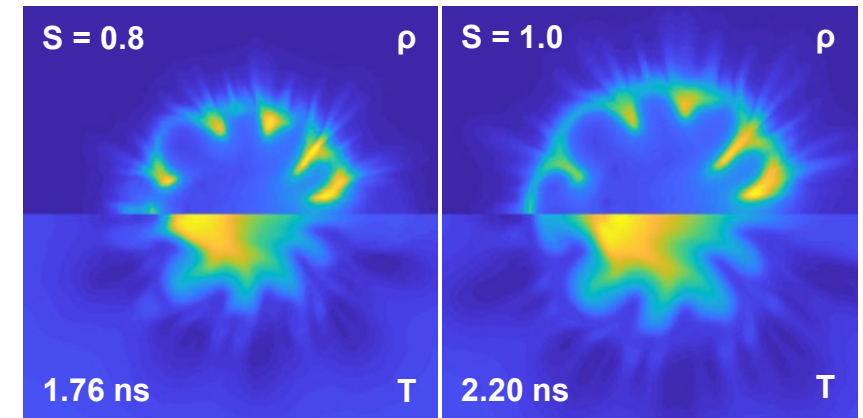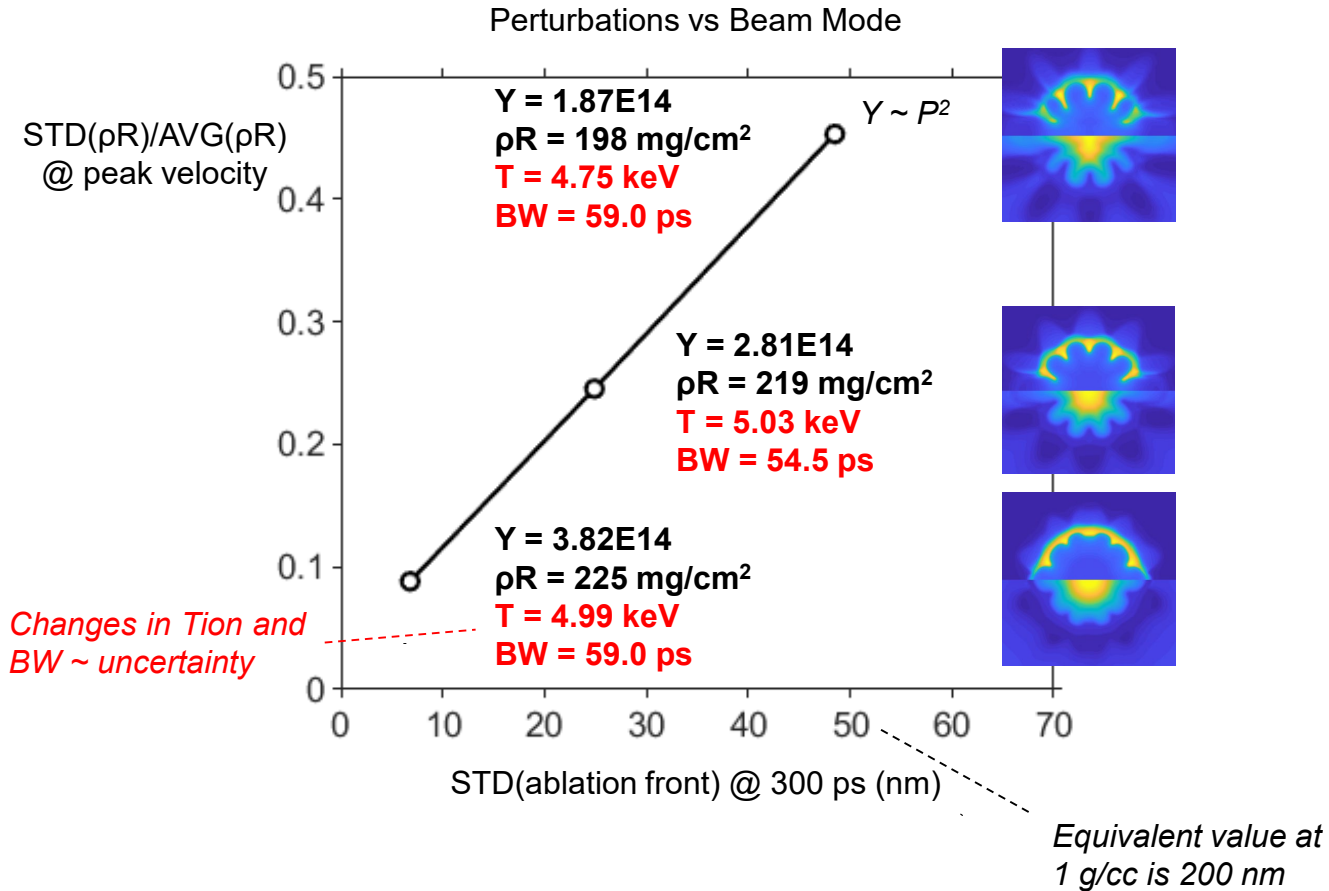

Calculations in DRACO with nominal levels of imprint, capsule roughness, and target offset (5 μ m) at two different scales. The hot spots are similar, but not self-similar.


Small targets show more degradation by flaws of a given size, and cause performance vs scale > 1-D expectations

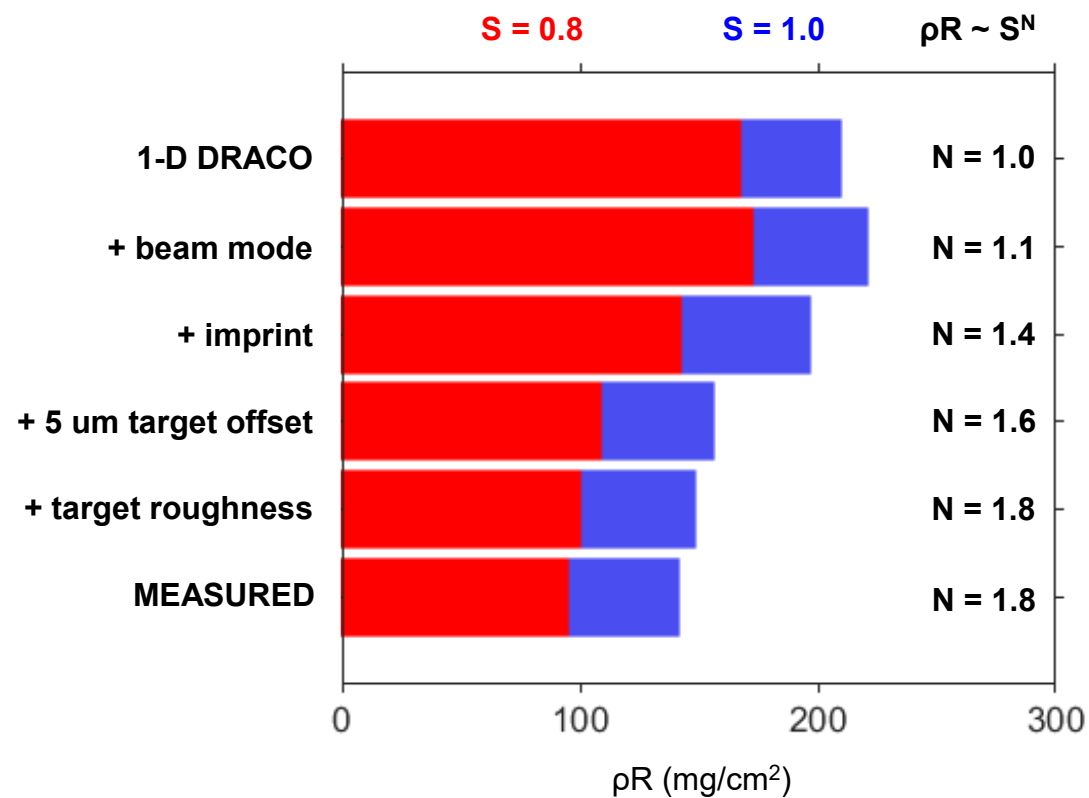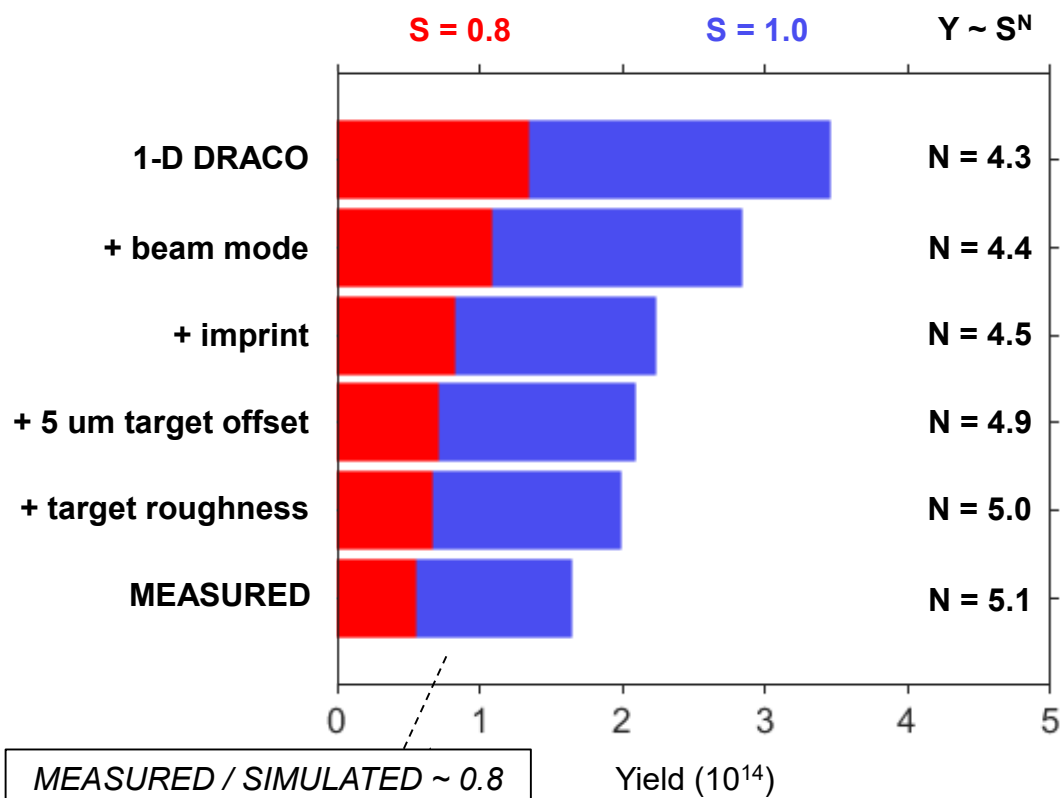


2-D calculations are not a perfect surrogate for 3-D (i.e., ASTER or HYDRA)

DRACO also predicts sensitivities in data to R_b/R_t , but estimates depend on physics models (e.g., Schurtz vs flux limiter in picket etc.)

Y (10^{14}) at constant implosion velocity

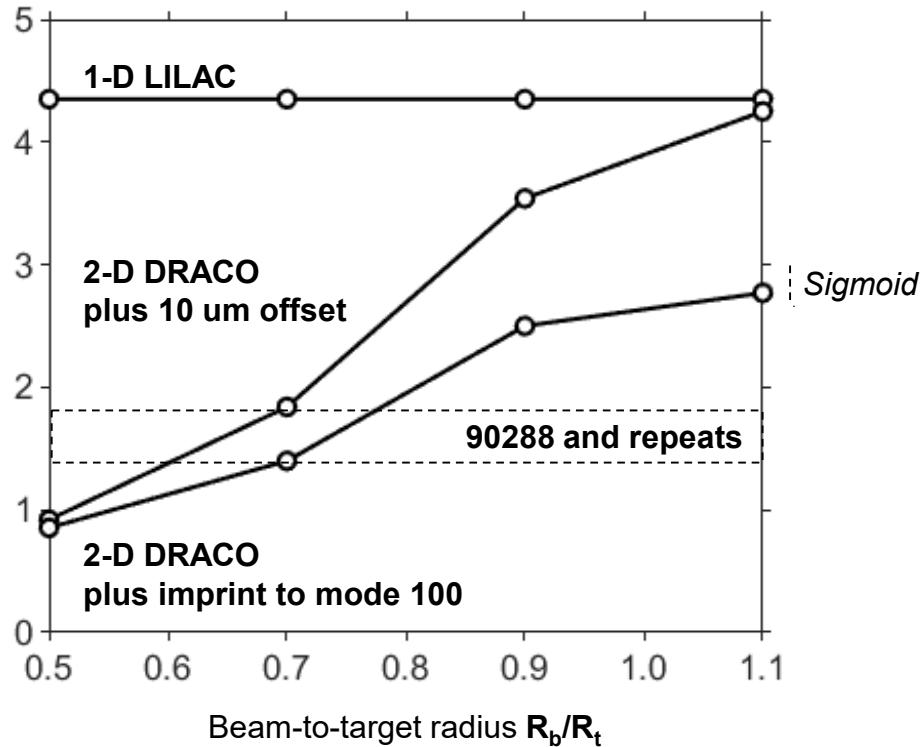


$Y_{\text{MSR}} / Y_{\text{PREDICTED}}$

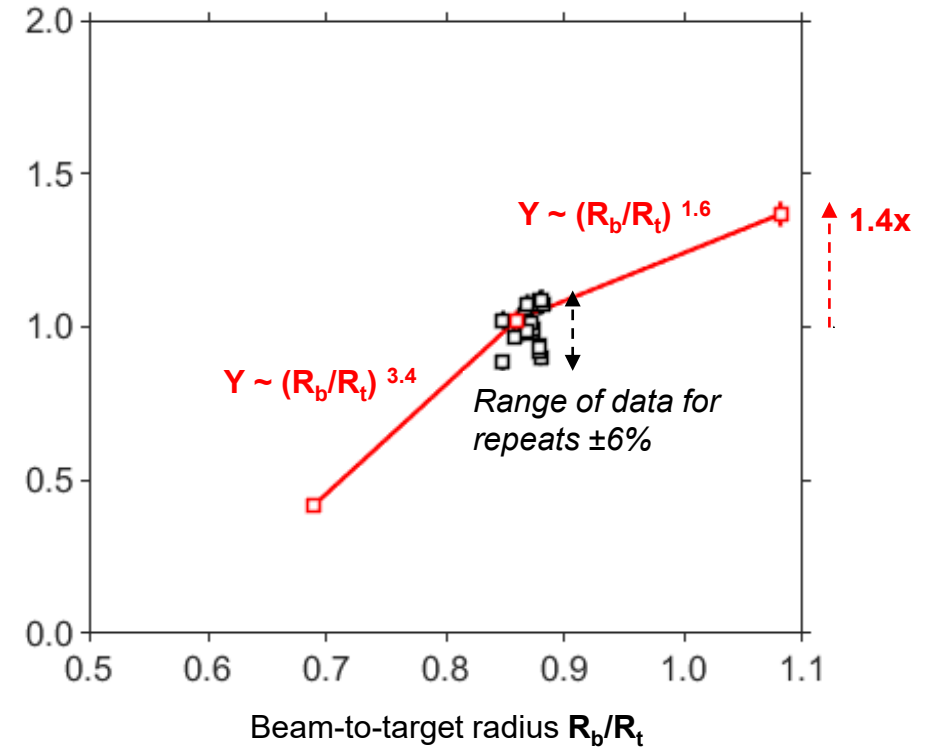


Final comparisons will also depend on a statistical treatment of flaws, more data

Potential of direct drive is a function of progress at OMEGA, and taking advantage of scale and beam-to-target radius

- IF OMEGA imperfections, imprint, etc., were smaller by 4x

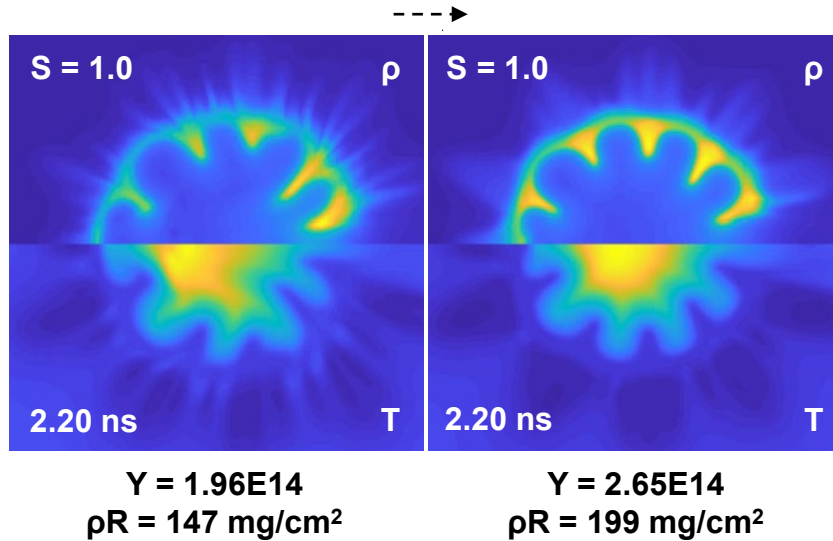


- OMEGA-like targets at NIF scale could behave similarly
 - Target offsets, roughness, etc. do not scale
 - Laser imprint is only critical for 50 to 100 ps
 - Relative improvement in target quality $\sim 4x$

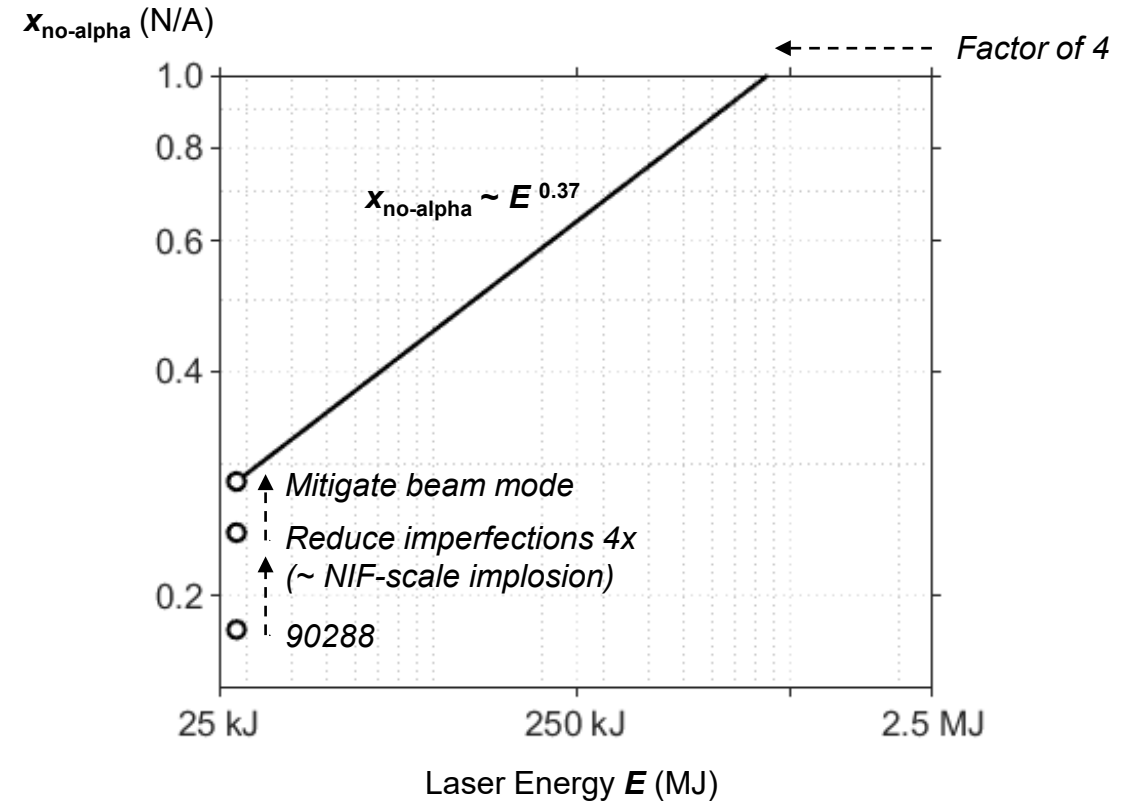

Low adiabat implosions are more unstable, and may have more to benefit

OMEGA database has been expanded with single variable studies in hydrodynamic scale (S) and beam-to-target radius (R_b/R_t)

- Measured yield and areal density increase as $S^{5.0 \pm 0.2}$ and $S^{1.8 \pm 0.2}$, respectively [Euler $\sim S^4$ and S]
- Experimental mitigation of the “beam mode” or beam radius can increase yield a factor of 1.4
- Calculations in 2-D predict similar trends, and are explained by laser and target flaws that do not scale (e.g., imprint, target offset, roughness)

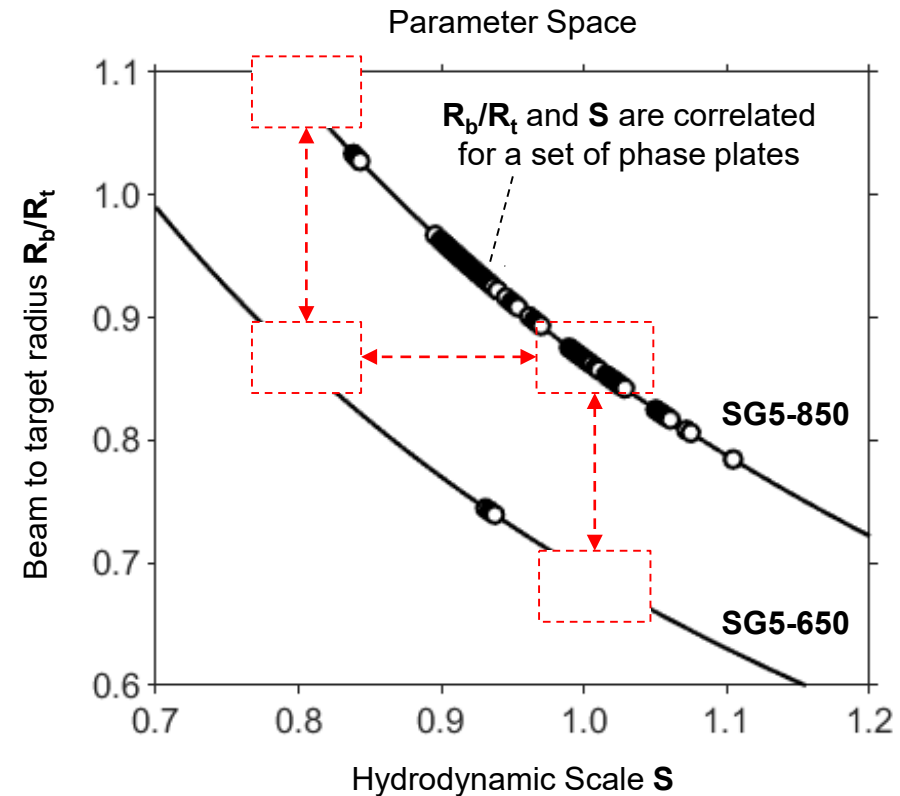

Future work to consider tradeoffs in pulse shape and timing since gain $\sim M_{DT} \rho R_{DT} / (\rho R_{DT} + 6)$

Backups